
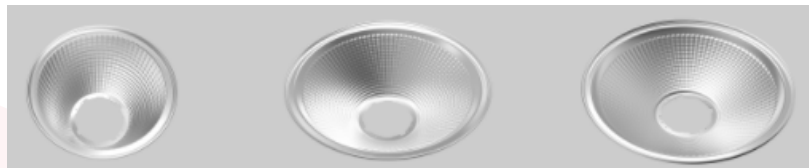
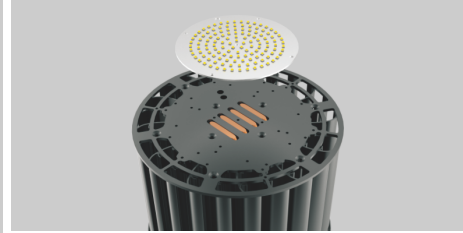



LED HIGH BAY

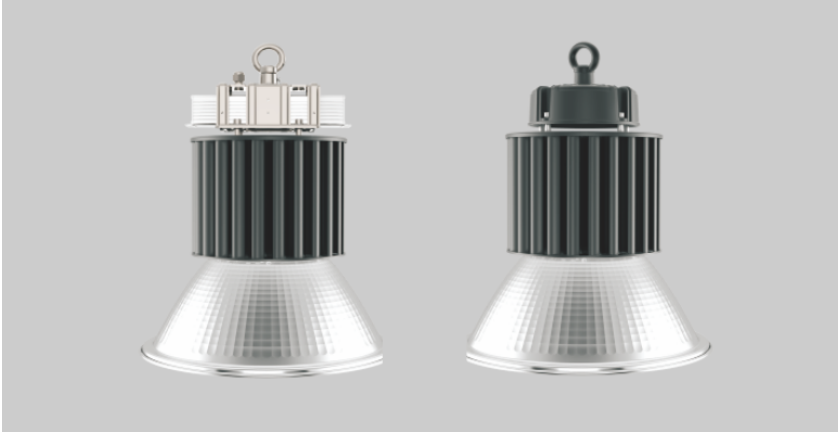

45D Ø420 mm.

90D Ø488 mm.

120D Ø500 mm.

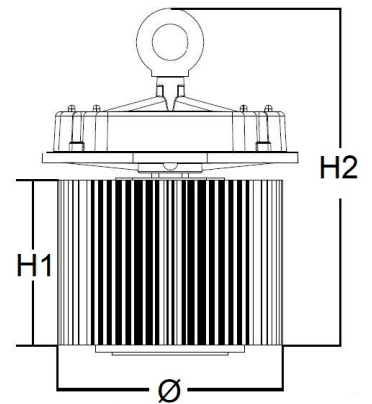

Excellent tranverse thermal conductivity, the heat can be scattered to periphery efficiently, the thermal difference between the light source and housing reduced, long life even used in high temperature work.

MODEL	POWER	EFFICIENCY	FLUX	CRI	CCT	PF	LIFE TIME	DIAMENSION (mm)
AL-HB-D75W	75 W		10500 lm					Ø180 H1: 190 H2:250
AL-HB-D100W	100 W		14000 lm		2500K		50000Hrs.	Ø180 H1: 190 H2:250
AL-HB-D150W	150 W	140 lm/watt	21000 lm	>80	-	>0.97	-	Ø180 H1: 240 H2:300
AL-HB-D200W	200 W		28000 lm		6500K		100000Hrs.	Ø180 H1: 240 H2:300
AL-HB-D250W	250W		35000 lm					Ø180 H1: 240 H2:300