



LED FLOODLIGHT

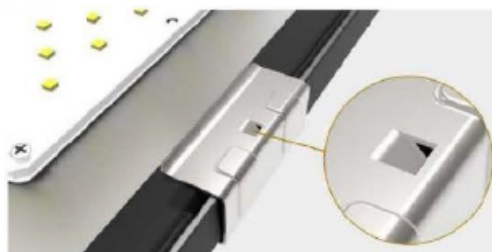

- High-pressure Die Cast Aluminium body and components.
- Impact resistant safety tempered glass cover
- External screws are in stainless steel with protection grease
- Meanwell High quality constant current LED driver
- IP65

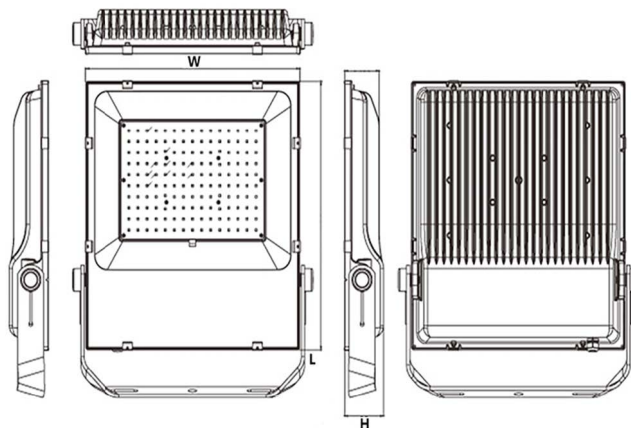

MODEL	POWER	EFFICIENCY	FLUX	CRI	CCT	PF	THDI	ANGLE	LIFE TIME	DIAMENSION (mm)
AL-FL-50W	50 W	140 lm/watt	7000 lm	>80	3000K	0.97	10%	120°	50000Hrs.	L:265 W:220 H:47
AL-FL-100W	100 W		14000 lm		4000K					L:300 W:245 H:49
AL-FL-150W	150 W		22500 lm		6500K					L:345 W:295 H:53
AL-FL-200W	200 W		28000 lm							L:400 W:360 H:53